Opera 17

INSTALLATION AND CONNECTION

Recommended installation height 6 in (15 cm).

Clearances

■ Front: 30 in (75 cm) ◀▶ Sides: 8 in (20 cm) ▲ Above: 8 in (20 cm) ▼ Underneath: 1 in (2,5 cm).

Installation Quick-mounted surface installation with easy snap-on bracket that also serves as marking template.

Connection 240-V unit: Flexible cord connection, including junction box cover. Installation requires 2 in X 3 in wall box (not included).

Note 3-conductor cable or 2-conductor cable with a third wire should be used if unit is to be linked with the Convectair Programmer module (7392 FP).

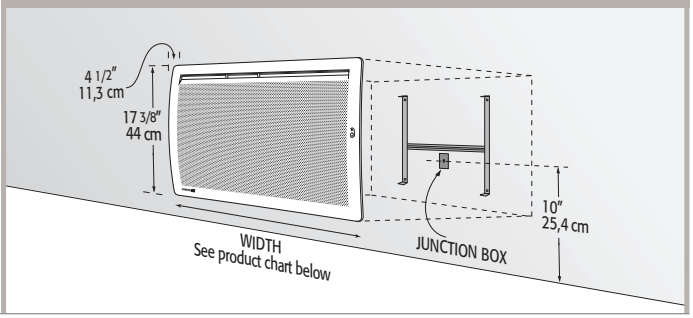

HEATING ELEMENT

Total capacity 500, 1 000, 1 500 and 2 000 W

Radiant heat Ribbed-high-emissivity monoblock element made of aluminum alloy.

Thermal protection Automatic reset overheat protection.

TEMPERATURE CONTROL

Programmable electronic thermostat Built-in electronic proportional-action thermostat ultraprecise to 1/5°F (1/10°C).

Programmer Control panel designed to accept the 7392 Programmer module.

CONTROL PANEL

Location On top right-hand side of the unit.

Energy use indicator.

LCD backlit screen with digital controls lockable by key combination.

On/Off button with indicator light.

Mode button with five settings: Comfort; Economy; Frost protection (45°F (7°C)); Program (programmed setback when connected to the Convectair Programmer); Absence detector (setback when absence detected).

Open-window button to activate open-window detection.

Ideal ºC button optimizes energy consumption and restores default settings.

« + and - » buttons set the temperature and lock the controls.

Heating indicator light.

CABINET

Steel construction with polyester/epoxy anti-rust powder coating and resistant to UV rays.

Cabinet Convex casing with rounded corners.

Grille Perforated front panel for better radiant heat with absence detector.

Colour BB = White

MODEL	Catalogue No.	Colour	Power 240 V	Power 208 V	Height cm	Height in	Width cm	Width in	Depth cm	Depth in	Net Weight kg	Net Weight lb
OPERA 17	7733-C05	BB	500	375	44	17 3/8	53,2	21	11,3	4 1/2	4,4	9,7
② (SP)	7733-C10	BB	1 000	750	44	17 3/8	63,7	25	11,3	4 1/2	5,3	11,7
	7733-C15	BB	1 500	1125	44	17 3/8	84,7	33 3/8	11,3	4 1/2	7	15,4
	7733-C20	BB	2 000	1500	44	17 3/8	105,7	41 5/8	11,3	4 1/2	8,7	19,2

Depth includes the mounting brackets.

② Compatible with the Programmer pilot-wire system (see technical specifications for catalogue number 7392).

(SP) Control panel is designed to accept the 7392 Programmer module.

For guaranteed, dependable operation, we recommend that all units be installed by a licensed electrical contractor in accordance with national and local codes. Consult **convectair.com** to find the most recent installation instructions for our heaters.